URBAN SURFACES™

THE **MODERN FLOORING** SOLUTION

2018

HARD SURFACE CATALOG

THE **MODERN FLOORING** SOLUTION

Urban Surfaces' portfolio meets every practical and aesthetic need - perfect for both compact living spaces and expansive commercial settings alike. Versatile and vibrant, our finely selected flooring products express both simplicity and depth. If you're looking for flooring that is simple, clean, current and on trend, you have found it in Urban Surfaces.

Barn Owl 9522-S | 8122

CONTENTS

RESIDENTIAL COLLECTION

SOUND-TEC FLOATING FLOOR — Sound-Tec is an "all-in-one" solution that will take your flooring to the next level. Featuring a 100% waterproof core, sound-reducing pad, easy clip installation system, and EZ-Clean Technology. **1**

CITY HEIGHTS RESIDENTIAL LVP — City Heights offers unmatched quality with design in mind. Featuring EZ-Clean Technology, an enlarged footprint, and a carefully curated selection of colors. **15**

MAIN STREET RESIDENTIAL LVP — Main Street brings the best overall value into one competitively priced solution. Featuring an extensive collection of colors with the multi-family market in mind. **29**

TOWN SQUARE RESIDENTIAL LVT — Town Square brings together the beautiful look of tile while maintaining the durability and warmth of luxury vinyl. Featuring ultra high quality stone and ceramic visuals. **39**

COMMERCIAL COLLECTION

HIGH-RISE COMMERCIAL LVP — High-Rise offers the perfect mix of aesthetics and practicality for commercial projects where quality design is a top priority. Featuring EZ-Clean Technology, premium embossing, and beveled edges. **45**

LEVEL SEVEN COMMERCIAL LVP — Level Seven delivers commercial performance with excessive wear protection. Featuring a 20 mil wear layer, beveled edges, and modern selection of colors. **51**

SAMPLES AVAILABLE UPON REQUEST

(800) 492-8722

NEW

SOUND-TEC 3.0

FLOATING FLOOR

Monterey 9510-S

FEATURES & BENEFITS:

WATERPROOF CORE

SOUND REDUCING PAD

FAST & SECURE CLIP SYSTEM

BEVELED EDGE

EZ-CLEAN COATING

LIFETIME WARRANTY

FLOORSCORE CERTIFIED

LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	STONE POLYMER COMPOSITE (SPC)
SIZE	7" X 48"
THICKNESS	6MM
WEAR LAYER	20 MIL
EDGE PROFILE	BEVELED
INSTALLATION	FLOATING
STC RATING	61
IIC RATING	66
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- MULTI-FAMILY
- CONDOMINIUMS
- STUDENT HOUSING

SPC

EZ-CLEAN COATING
ENHANCED POLYURETHANE SYSTEM
HIGHLY STAIN RESISTANT

20 MIL WEAR LAYER
EXCESSIVE WEAR PROTECTION

HD FILM
HIGH DEFINITION LOOK
WIDE COLOR SELECTION

STONE POLYMER COMPOSITE (SPC) CORE
100% WATERPROOF CORE MADE OF HIGHLY DURABLE SPC
HEAT FUSION TECHNOLOGY
GEN5 EASY CLIP SYSTEM
DENSITY OF 1900
75% LIMESTONE

HIGH DENSITY EVA FOAM UNDERLAYMENT
ADVANCED SOUND REDUCTION
SURPASSES STC AND IIC SOUND REQUIREMENTS
PROVIDES EXTRA COMFORT

Iron Wood 9504-S

Twilight 9505-S

Ash 9507-S

8307 | 7070

Monterey 9510-S

SOUND-TEC FLOATING FLOOR

La Jolla 9516-S

Barn Owl 9522-S

8122

Midland Grey 9525-S

8050

Daybreak 9532-S

Available in multiple lines

Kodiak 9537-S (pg 11,12)

Alamo 9538-S

Cheyenne 9553-S

Stormy Sky 9557-S

SOUND-TEC FLOATING FLOOR

Sierra 9560-S 8060

Navajo 9563-S

Magnolia 9565-S

Espresso 9570-S

High shade variation Available in multiple lines

Midnight Grey 9573-S

7030

Yosemite 9599-S

(pg 25,26) 8699

Sound-Tec Moldings

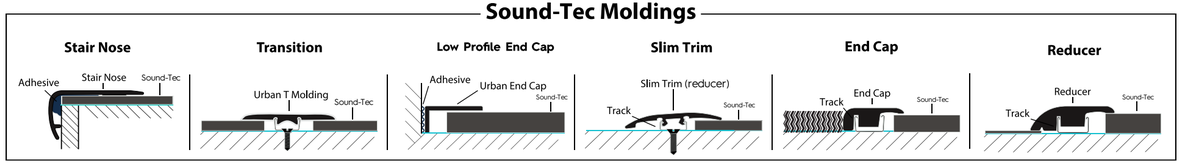

MATCHING MOLDINGS AVAILABLE IN ALL SOUND-TEC COLORS

See pages 65-66 for details

FAST & SECURE
CLIP SYSTEM

DECREASE INSTALLATION TIME, INCREASE PROFIT

Alamo 9538-S

Iron Wood 9504-S

Kodiak 9537-S

NEW

Kodiak 9537-S

Midnight Grey 9573-S | 7030

SOUND-TEC FLOATING FLOOR | SPECIFICATIONS

PRODUCT LINE	SOUND-TEC
CONSTRUCTION	STONE POLYMER COMPOSITE (SPC)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	20 MIL
OVERALL THICKNESS	6 MM - 0.236"
EDGE	BEVELED
SIZE	7" WIDE X 48" LONG
FINISH	POLYURETHANE + EZ-CLEAN
INSTALLATION	FLOATING

PACKAGING

SQUARE FEET PER CARTON	23.47
PIECES PER CARTON	10
WEIGHT PER CARTON	45 LBS
CARTONS PER PALLET	50

PERFORMANCE TESTING

SOUND RATING	STC - 61 I IIC - 66
SLIP RESISTANCE / ASTM D2047	≥ 0.5 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	20 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

FEATURES & BENEFITS:

WATERPROOF VINYL | PREMIUM EMBOSSING | ADVANCED BOND BACKING | SQUARE EDGE | EZ-CLEAN COATING | LIFETIME WARRANTY | FLOORSCORE CERTIFIED | LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	LUXURY VINYL PLANK (LVP)
SIZE	7" X 48"
THICKNESS	2MM
WEAR LAYER	8 MIL
EDGE PROFILE	SQUARE
INSTALLATION	GLUE DOWN
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- MULTI-FAMILY
- HOSPITALITY
- CONDOMINIUMS
- STUDENT HOUSING
- SENIOR HOUSING

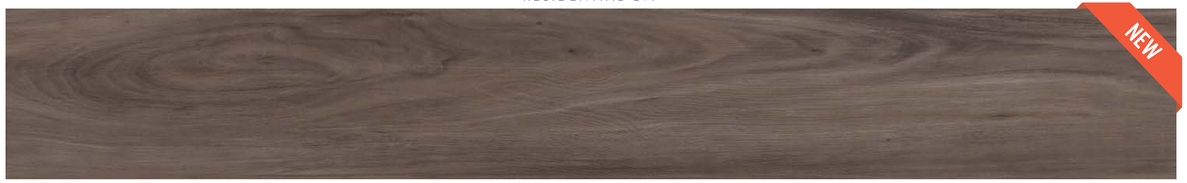

Berlin 8604

Everest 8608 (pg 19,20)

Slate Grey 8610

Grand Oak 8618

Union Ridge 8655 (pg 21,22)

River North 8656 (pg 23,24)

Yosemite 8699 (pg 25,26) 9599-S

High shade variation Available in multiple lines

Everest 8608

NEW

Union Ridge 8655

River North 8656

Yosemite 8699 | 9599-S

NEW

Berlin 8604

CITY HEIGHTS RESIDENTIAL LVP | SPECIFICATIONS

PRODUCT LINE	CITY HEIGHTS
CONSTRUCTION	LUXURY VINYL PLANK (LVP)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	8 MIL
OVERALL THICKNESS	2 MM - 0.079"
EDGE	SQUARE
SIZE	7" WIDE X 48" LONG
FINISH	POLYURETHANE + EZ-CLEAN
INSTALLATION	GLUE DOWN
RECOMMENDED ADHESIVE	URBAN 3010 I URBAN-3020

PACKAGING

SQUARE FEET PER CARTON	36.59
PIECES PER CARTON	15
WEIGHT PER CARTON	29 LBS
CARTONS PER PALLET	75

PERFORMANCE TESTING

SLIP RESISTANCE / ASTM D2047	≥ 0.6 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SURFACE BURNING / ASTM E84	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	10 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

MAIN|STREET
RESIDENTIAL LVP

Ash 9507-S | 8307 | 7070

FEATURES & BENEFITS:

WATERPROOF VINYL

ADVANCED BOND BACKING

SQUARE EDGE

POLYURETHANE COATING

LIFETIME WARRANTY

FLOORSCORE CERTIFIED

LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	LUXURY VINYL PLANK (LVP)
SIZE	6" X 36"
THICKNESS	2MM
WEAR LAYER	8 MIL
EDGE PROFILE	SQUARE
INSTALLATION	GLUE DOWN
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- MULTI-FAMILY
- HOSPITALITY
- CONDOMINIUMS
- STUDENT HOUSING
- SENIOR HOUSING

Midland Grey 8050

9525-S

Sierra 8060

9560-S

Aspen 8070

Driftwood 8106

Poplar 8113

Vineyard 8114

Beach House 8121

Barn Owl 8122

9522-S

Available in multiple lines

Eastern Walnut 8125

Dark Walnut 8131

Ash 8307

9507-S | 7070

Durango 8308

Available in multiple lines

Sierra 9560-S | 8060

Poplar 8113

Beach House 8121

Durango 8308

MAIN|STREET RESIDENTIAL LVP | SPECIFICATIONS

PRODUCT LINE	MAIN STREET
CONSTRUCTION	LUXURY VINYL PLANK (LVP)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	8 MIL
OVERALL THICKNESS	2 MM - 0.079"
EDGE	SQUARE
SIZE	6" WIDE X 36" LONG
FINISH	POLYURETHANE
INSTALLATION	GLUE DOWN
RECOMMENDED ADHESIVE	URBAN 3010 I URBAN-3020

PACKAGING

SQUARE FEET PER CARTON	36
PIECES PER CARTON	24
WEIGHT PER CARTON	28 LBS
CARTONS PER PALLET	78

PERFORMANCE TESTING

SLIP RESISTANCE / ASTM D2047	≥ 0.6 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SURFACE BURNING / ASTM E84	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	10 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

TOWN SQUARE

RESIDENTIAL LVT

Athens 1070-G

FEATURES & BENEFITS:

WATERPROOF VINYL

ADVANCED BOND BACKING

SQUARE EDGE

POLYURETHANE COATING

LIFETIME WARRANTY

FLOORSCORE CERTIFIED

LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	LUXURY VINYL TILE (LVT)
SIZE	18" X 18" | 12" X 24"
THICKNESS	3MM
WEAR LAYER	8 MIL
EDGE PROFILE	SQUARE | GROUT LINE
INSTALLATION	GLUE DOWN
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- MULTI-FAMILY
- HOSPITALITY
- CONDOMINIUMS
- STUDENT HOUSING
- SENIOR HOUSING

Warm Slate 1057

Travertine 1541

Genuine Ceramic 1783

Athens 1070-G - 12" X 24"

Travertine 1541

TOWN SQUARE RESIDENTIAL LVT | SPECIFICATIONS

PRODUCT LINE	TOWN SQUARE
CONSTRUCTION	LUXURY VINYL TILE (LVT)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	8 MIL
OVERALL THICKNESS	3 MM - 0.118"
EDGE	SQUARE I GROUT LINE
SIZE	18" WIDE X 18" LONG I 12" WIDE X 24" LONG
FINISH	POLYURETHANE
INSTALLATION	GLUE DOWN
RECOMMENDED ADHESIVE	URBAN 3010

PACKAGING

SQUARE FEET PER CARTON	36
PIECES PER CARTON	16
WEIGHT PER CARTON	40 LBS
CARTONS PER PALLET	52

PERFORMANCE TESTING

SLIP RESISTANCE / ASTM D2047	≥ 0.6 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SURFACE BURNING / ASTM E84	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	10 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

NEW

HIGH-RISE
COMMERCIAL LVP

Denali 7103

FEATURES & BENEFITS:

WATERPROOF VINYL | PREMIUM EMBOSSING | ADVANCED BOND BACKING | BEVELED EDGE | EZ-CLEAN COATING | LIFETIME WARRANTY | FLOORSCORE CERTIFIED | LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	LUXURY VINYL PLANK (LVP)
SIZE	7" X 48"
THICKNESS	3MM
WEAR LAYER	20 MIL
EDGE PROFILE	BEVELED
INSTALLATION	GLUE DOWN
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- RETAIL
- HOSPITALITY
- MEDICAL FACILITIES
- OFFICE SPACES

Kenwood 7101

Bridgeport 7102

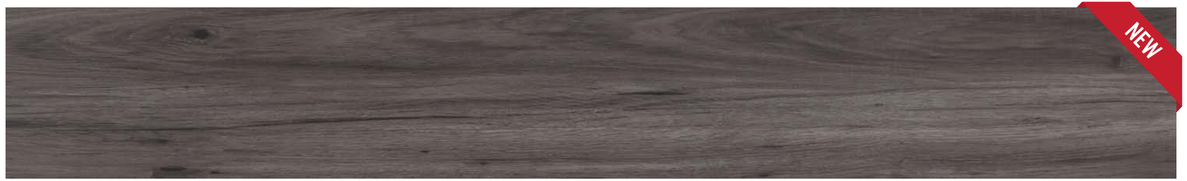

Denali 7103

Bridgeport 7102

HIGH-RISE COMMERCIAL LVP | SPECIFICATIONS

PRODUCT LINE	HIGH-RISE
CONSTRUCTION	LUXURY VINYL PLANK (LVP)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	20 MIL
OVERALL THICKNESS	3 MM - 0.118"
EDGE	BEVELED
SIZE	7" WIDE X 48" LONG
FINISH	POLYURETHANE + EZ-CLEAN
INSTALLATION	GLUE DOWN
RECOMMENDED ADHESIVE	URBAN 3020

PACKAGING

SQUARE FEET PER CARTON	34.6
PIECES PER CARTON	14
WEIGHT PER CARTON	41 LBS
CARTONS PER PALLET	65

PERFORMANCE TESTING

SLIP RESISTANCE / ASTM D2047	≥ 0.6 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SURFACE BURNING / ASTM E84	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	20 YEAR
COMMERCIAL WARRANTY	10 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

LEVEL SEVEN
COMMERCIAL LVP

Rockport 7095

FEATURES & BENEFITS:

WATERPROOF VINYL

ADVANCED BOND BACKING

BEVELED EDGE

POLYURETHANE COATING

LIFETIME WARRANTY

FLOORSCORE CERTIFIED

LEED POINT ELIGIBLE

SPECIFICATIONS:

CONSTRUCTION	LUXURY VINYL PLANK (LVP)
SIZE	7" X 48"
THICKNESS	3MM
WEAR LAYER	20 MIL
EDGE PROFILE	BEVELED
INSTALLATION	GLUE DOWN
LEED SCORECARD	EQ4.3

RECOMMENDED FOR:

- RETAIL
- HOSPITALITY
- MEDICAL FACILITIES
- OFFICE SPACES

Sunrise 7010

Cloud 7020

Midnight Grey 7030

9573-S

Timber 7060

Ash 7070

9507-S | 8307

Cedar 7080

Rockport 7095

Stoney Mountain 7099

Available in multiple lines

Timber 7060

Cedar 7080

Stoney Mountain 7099

LEVEL SEVEN COMMERCIAL LVP | SPECIFICATIONS

PRODUCT LINE	LEVEL SEVEN
CONSTRUCTION	LUXURY VINYL PLANK (LVP)
CLASS	ASTM F1700, CLASS III, TYPE B
WEAR LAYER	20 MIL
OVERALL THICKNESS	3 MM - 0.118"
EDGE	BEVELED
SIZE	7" WIDE X 48" LONG
FINISH	POLYURETHANE
INSTALLATION	GLUE DOWN
RECOMMENDED ADHESIVE	URBAN 3020

PACKAGING

SQUARE FEET PER CARTON	34.6
PIECES PER CARTON	14
WEIGHT PER CARTON	41 LBS
CARTONS PER PALLET	65

PERFORMANCE TESTING

SLIP RESISTANCE / ASTM D2047	≥ 0.6 (DRY)
RADIENT FLUX / ASTM E648	CLASS I
STATIC LOAD / ASTM F970-07	PASSES
ABRASION RESISTANCE / ASTM D3389	PASSES
LIGHT RESISTANCE / ASTM F1515	PASSES
HEAT RESISTANCE / ASTM F1514	PASSES
CHEMICAL RESISTANCE / ASTM F925	PASSES
SURFACE BURNING / ASTM E84	PASSES
SMOKE DENSITY / ASTM E662-09	PASSES

WARRANTY

MANUFACTURER'S WARRANTY	LIFETIME
RESIDENTIAL WARRANTY	20 YEAR
COMMERCIAL WARRANTY	10 YEAR

ENVIRONMENTAL

INDOOR AIR QUALITY	FLOORSCORE® CERTIFIED
LEED SCORECARD	EQ4.3
CHPS 01350	PASSES

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. See UrbanSurfaces.com for more information.

floor score

by SCScertified

U.S. GREEN BUILDING COUNCIL
LEED PLATINUM
USGBC

FLOOR SCORE CERTIFIED
Embrace Healthy Living

LEED POINT QUALIFIED
Build Sustainably

What are you breathing?

Research by the RFCI shows that on average a person will spend 90% of their life indoors. Whether it be in your working environment, your home, or sitting in a movie theater, you will spend a majority of your time inside. When this is realized you may want to know how healthy the air quality is, and rightly so. A recent study done by the Environmental Protection Agency (EPA) found that indoor air was deemed two to five times more harmful than outdoor air. This is due to many harmful pollutants including radon, mold, and carbon dioxide found indoors. Healthy air contributes to better learning in schools, improved productivity in offices, and more comfortable homes. Poor indoor air quality (IAQ) can be a factor in a variety of health problems, such as headaches, dizziness, and more serious long-term effects.

Why FloorScore?

When it comes to indoor air quality, a primary concern is the emission level of specific volatile organic compounds (VOCs). FloorScore® IAQ Certification means that a flooring product is independently certified by SCS Global Services to comply with the volatile organic compound emissions criteria of the California Section 01350 Program. Hundreds of resilient flooring materials and their adhesives bear the FloorScore® seal. This seal tells you that the products have been independently certified by SCS to comply with the volatile organic compound emissions criteria of the California Section 01350 standard. Any product that has met these stringent standards is a product that will contribute to good IAQ.

FloorScore Requirements

To earn the FloorScore® seal, a flooring product must satisfy the requirements of the SCS-EC-10.2-2007 Environmental Certification Program – Indoor Air Quality Performance, which includes:

- Testing demonstrating compliance with emission concentrations for listed VOCs under California Section 01350
- Manufacturing facility on-site audits and yearly surveillance audits
- Annual product re-testing
- Product record keeping
- A documented quality control plan

+1 LEED POINT ELIGIBLE

URBAN SURFACES

Why **hard surface flooring?**

Hard surface floors are easy to clean and maintain because they provide a one-dimensional surface that doesn't absorb odors, spills, dust, or soil. They also don't retain moisture, which can lead to microorganisms such as dust mites and mold.

ACCESSORIES

Universal Primer - Taylor 2025

An acrylic latex solution made for use as a primer coat on floor patch, acoustical concrete and other porous surfaces to prevent over absorption of adhesive and to ensure a better bond. Also use to neutralize excess alkali.

SIZE	4 GAL.
WEIGHT	35 LBS
COVERAGE	2,000 SQFT

Urban-3010

Offers the extended working time required for larger installation projects. Urban-3010 is a solvent-free, easy troweling adhesive that is perfect for installing luxury vinyl and carpet tile alike.

SIZE	4 GAL.	1 GAL.
WEIGHT	34 LBS	9 LBS
COVERAGE	600 SQFT	150 SQFT

Urban-3020

Solvent-free, non-flammable, easy troweling adhesive that provides excellent installation for tile-over-tile applications, luxury vinyl tile and plank, solid vinyl tile and plank, vinyl composition tile, homogeneous vinyl sheet goods, rubber tile and sheet goods.

SIZE	4 GAL.	1 GAL.
WEIGHT	34 LBS	9 LBS
COVERAGE	600 SQFT	150 SQFT

Clear-Coat - 3040

Enhances floor shine, increases durability, masks imperfections and restores original luster. Clear-Coat provides easy application and short recoat time. *Not for use on floors with EZ-Clean.

SIZE	1 GAL.
WEIGHT	9 LBS
COVERAGE	1,000 SQFT

Urban Trowel

Provides an easy application for Urban adhesives and allows them to spread at the proper rate for installing luxury vinyl.

SIZE	1/16" X 1/16" X 1/16"
NOTCH	SQUARE

Floor Protectors

A simple and easy solution to protect your floor from scuffs and scratches.

PIECES	18
MATERIAL	FELT

FreshFloors - Taylor

Uses nature's nano-technology to clean hardwood, ceramic, stone, resilient, laminate, carpet and rug floorings. One product replaces all other cleaners, stain removers and odor eliminators.

SIZE	32 OZ.
WEIGHT	946 ML



Whisper Step® - Leggett & Platt

High density underlayment that provides unmatched support for both glue down and floating floors. Installs quickly and easily. Fresh Dimension® antimicrobial inhibits the growth of mold, mildew, and odor-causing bacteria

IIC	66
ΔIIC	22
STC	63

RESTORE YOUR FLOOR

ENHANCED FLOOR SHINE

SHORT RECOAT TIME

INCREASED DURABILITY

EASY TO APPLY

CLEAR-COAT

ACRYLIC FLOOR FINISH - 3040

*NOT FOR USE ON FLOORS WITH EZ-CLEAN.

BECAUSE GREAT FLOORS...

- WATER RESISTANT
- FREEZE/THAW STABLE
- NON-FLAMMABLE
- EASY TROWELING
- EXCELLENT WORKING TIME

SUPERIOR FLEXIBILITY FOR LARGE INSTALLATIONS

URBAN-3010

PRESSURE SENSITIVE ADHESIVE

FOR USE WITH LUXURY VINYL & CARPET TILE

...NEED GREAT ADHESIVE

- WATER RESISTANT
- FREEZE/THAW STABLE
- NON-FLAMMABLE
- EASY TROWELING
- EXCELLENT WORKING TIME

OUR BEST SOLUTION FOR LUXURY VINYL FLOORING

URBAN-3020

TRANSITIONAL PRESSURE SENSITIVE™ ADHESIVE

FOR USE WITH LUXURY VINYL FLOORING

SOUND-TEC FLOATING FLOOR

MOLDINGS

MATCHING MOLDINGS AVAILABLE IN ALL SOUND-TEC COLORS

STAIR NOSE

Sound-Tec Stair Nose combines style and function to enhance the beauty of a staircase or step.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	PVC
LENGTH	94"
DIMENSIONS	2" WIDE X 1" TALL X 3/32" THICK



END CAP

Used to transition from Sound-Tec to carpet, masonry (fireplaces), sliding doors and other exterior door jambs.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	MOISTURE RESISTANT MDF
LENGTH	94"
DIMENSIONS	1-3/8" WIDE X 1/2" TALL



LOW PROFILE END CAP

Used to finish Sound-Tec against bathtubs, sliding glass doors, etc.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	PVC
LENGTH	94"
DIMENSIONS	1" WIDE x 3/8" TALL



T-MOLDING

Used to cover expansion gaps in a Sound-Tec installation and interior door thresholds.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	PVC
LENGTH	94"
DIMENSIONS	1/8" WIDE X 1-1/2" TALL



SLIM TRIM (SLT)

Our Slim Trim 2 in 1 Molding functions as a Reducer and T-molding. Comes with SlimTrack and Versatrack Shim.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	PVC
LENGTH	94"
DIMENSIONS	2" WIDE X 1/4" TALL



REDUCER

Used to transition from Sound-Tec to sheet vinyl, LVT, concrete or other low profile floor coverings.

SURFACE MATERIAL	HIGH WEAR RESISTANT ALUMINUM OXIDE LAMINATE
CORE MATERIAL	PVC
LENGTH	94"
DIMENSIONS	1-3/4" WIDE x 1/2" TALL



INSTALLATION METHODS



90° Random



90° Subway Style



90° Herringbone*



45° Random

45° Subway Style



45° Herringbone*

*HERRINGBONE INSTALLATION METHOD CANNOT BE USED WITH SOUND-TEC PRODUCTS.

DECORATE YOUR WALLS WITH LUXURY VINYL FLOORING

URBAN SURFACES

(800) 492-8722
WWW.URBANSURFACES.COM
1121 OLYMPIC DRIVE, CORONA, CA 92881