

HOW TO INSTALL SOUND-TEC WITH RAPIDLOCK



WARNING:

Sound-Tec with RapidLock is **NOT** compatible with previous versions of Sound-Tec.




Verify that your box features the RapidLock logo and that the product number is followed by **-D** instead of **-S**.




WARNING:

Inspect planks for irregularities. Do not install if defects are present.

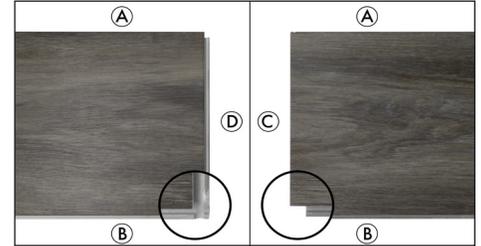


1.

Familiarize yourself with all 4 sides of the plank. Side A will clip into side B. Side C will drop and lock into side D.

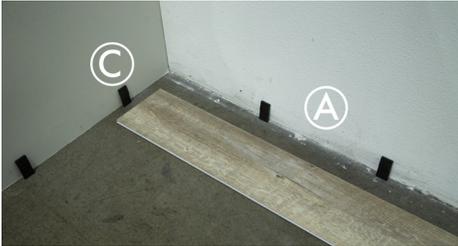

2.

Working from left to right, lay the first plank alongside the longest wall with sides A and C facing the wall. Use spacers to leave a 1/4" gap between the wall and the plank.

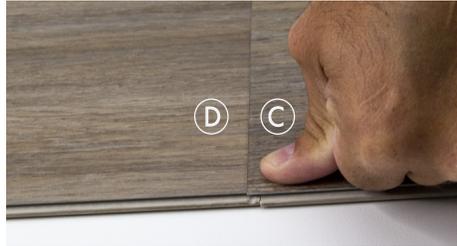


3.

Align side C of the next plank to side D of the previous plank. Drop side C onto side D and press gently to engage the clip. You should hear it click into place. Repeat this step until you finish the first row.



WARNING:

Do not lift planks once the clip has been engaged. This will damage the clip. See "How To Uninstall RapidLock".

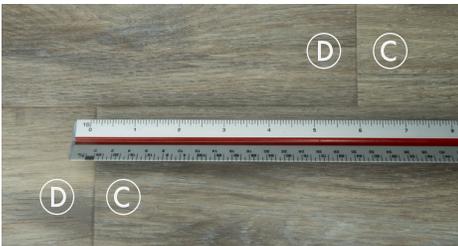


4.

When starting a new row, cut the first plank to ensure at least a 6" gap between sides C and D of the previous row and sides C and D of the new row.



5.

Align side A of the new plank to side B of the parallel row. Insert side A into side B at a 45° angle and lay the plank flat.

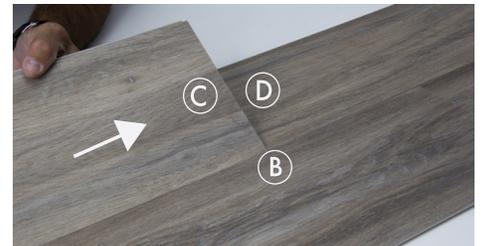

6.

Continue the row by inserting side A of the next plank into side B of the parallel row at a 45° angle. Slide the plank until it reaches side D of the previous plank and drop gently.




7.

Press with your thumb on both ends of side C. Continue pressing until you hear the plank "click" into place.



8.


Tap with a soft-faced hammer on both ends of side C.

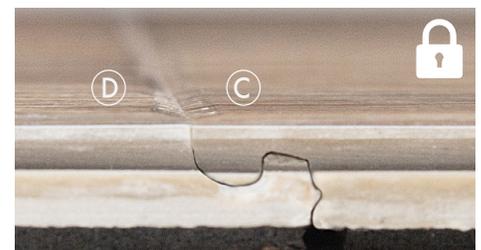

9.

Planks are now fully locked. Repeat steps 4-8 until the row is complete.


HOW TO UNINSTALL SOUND-TEC WITH RAPIDLOCK

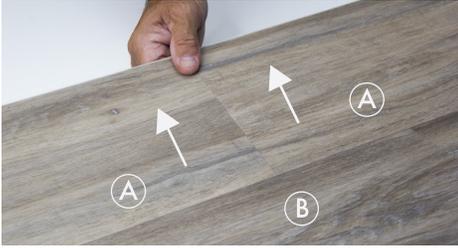

1. Always start by disengaging side A. Grab the planks and gently lift at the same time until the planks disengage.




2. Place planks gently on the floor.

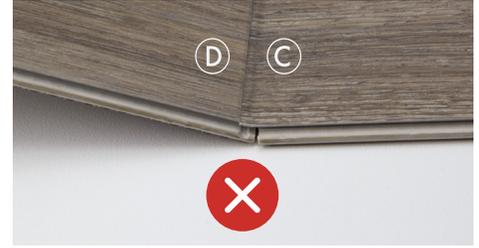

WARNING:

Do not lift planks to separate. This will damage the planks. Keep planks flat until they are fully separated.

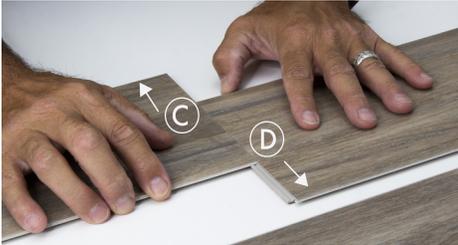

3. To disengage sides C and D, slide the planks in the opposite direction. Press the planks gently while sliding. Continue sliding until the planks are fully separated.



4. If planks are not disengaging, tap with a soft-faced hammer on both ends of side C to ensure that the clip is fully engaged. You will not be able to separate the planks if the clip is not fully engaged. Once planks are engaged repeat step 3.



NOTE:

To schedule a product training session, please contact us at (800) 492-URBAN (8722).